


HKS inbetween 14 mm, oak

Type/Construction	1 strip plank in 2 layer construction, approx. 3 mm top layer oak on plywood, WBP glued
Dimensions	14/3 x 190 mm
Lengths	random lengths 600 – 1.900 mm; system-packaging to length of 1.900 mm; 7 layers per bundle, 6 full lengths, 1 layer broken (system 6-1-0)
Packaging	shrinking foil, HKS white carton, maintenance and installing instruction included
Profile	all around tongue and groove, 4-sides beveled (GO4)
Finish	brushed & unfinished, brushed & oiled (UV), brushed & white oiled (UV)
Production	according to EN 13489
Grading*	Rustic (E) - according to the description of the factory. - midsize and big knots, if necessary filled - filled surface cracks, small end cracks - light dark discolouration - vivid wood structure and colour related to growth - sapwood
Installation	gluing down on concrete or floating installation on Elastilon; always according to the instructions of the manufacturer (adhesive, glue, Elastilon, etc.)
Maintenance	depending on use with suitable maintenance products
Underfloor heating	only with warm water system, no electric heating systems, surface temperature max. 29° C with equal heating, heat conductivity 0,17 W(m k); thermal resistance 0,082 m ² K/W
Fire resistance	D _n -s1
Labeling	CE, A+
Hints	wooden floorings are a natural product, due to climate conditions joints can occur in winter and the planks can swell in summer. Therefore, an expansion gap to the walls of min. 15 mm is necessary. According to the behaviour of the planks the customer must be advised.

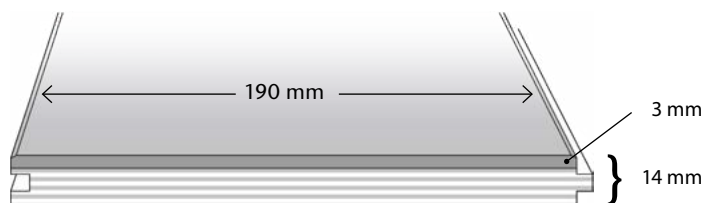

*according to the factory standard, 3% clause to EN standard, max. 3% of the complete delivery including the cutting differences can differ from the grading description. The material must be checked before installation, claims after the installation are impossible.