




RIGID / SPC Vinyl with clic system
unilin fold down technologies



23/31

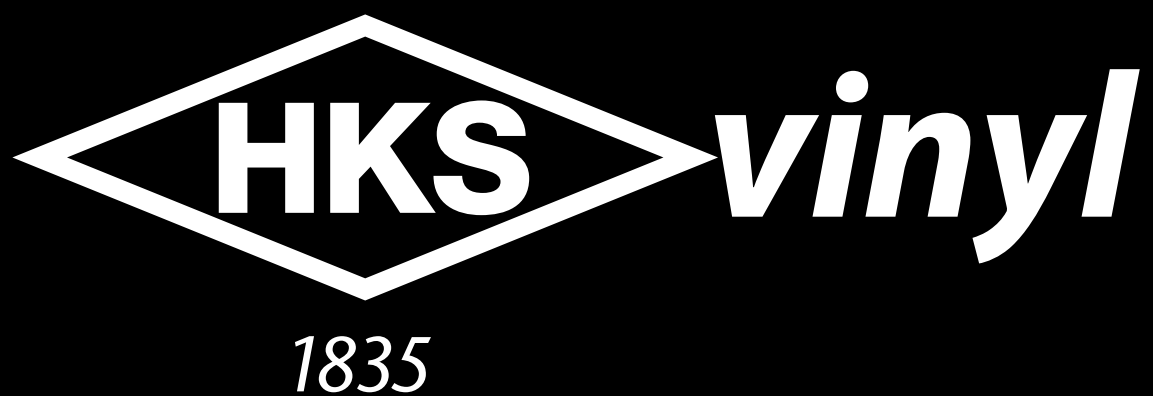

Thickness: 5,2 mm
 Top layer : 0,3 mm
 1 mm Blax IXPE – 15 times foaming,
 medium high density
 Dimensions 1.220 x 180 mm (L x W)

CE

ISO 9001
 ISO 14001



FLINT



SHADOW




TUNDRA



ACORN



RIGID / SPC Vinyl with clic system
unilin fold down technologies



33/42



Thickness: 5,2 mm
Top layer : 0,5 mm
1 mm Blax IXPE – 15 times foaming,
medium high density
Dimensions 1.220 x 180 mm (L x W)



ISO 9001
ISO 14001



ASHEN



WHITEN



FUERTA



LARIX





HKS vinyl installation video

Get Expert Advice



Heinr. Krüger + Sohn GmbH & Co. KG

An der Kleimannbrücke 52
D-48157 Münster / Germany

Tel.: +49 (0) 251 / 9328 - 0
Fax: +49 (0) 251 / 9328 - 112
info@hks1835.com
www.hks1835.com